




CT2003FB, CT2004FB, CT2005

ELECTRIC 6,000 FT/LBS.

MAST CRANE

VENTURO'S EXCLUSIVE FEATURES:

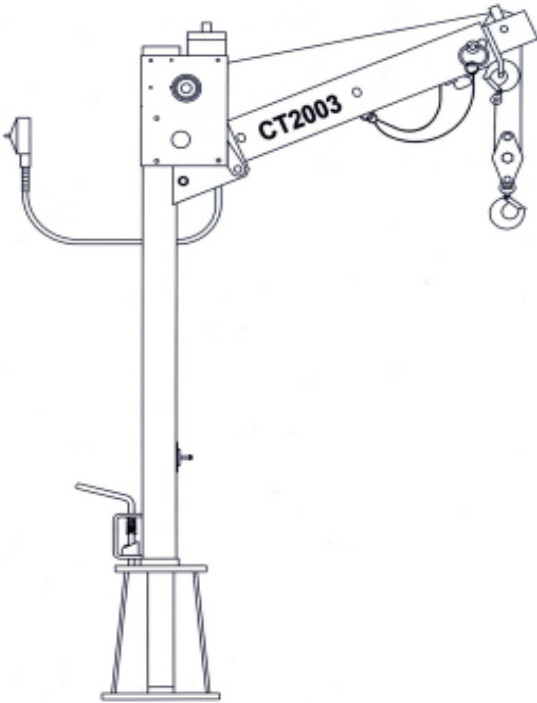

Hheavy duty, high torque, high speed winch for increased productivity.

Mounting sockets that allow easy crane removal for multiple operation locations and varied uses of vehicle.

Manual 360 degree rotation with 8 position positive pin lock provides safe control of rotating loads.


Composite polymer and bronze self-lubricating rotation bearings which are not sensitive to water, dirt or chemical contamination.

HEAVY DUTY WINCH FEATURES

- 12 Volt DC heavy duty motor.
- 1200 lbs. single line capacity, 2000 lbs. double line capacity.
- Heavy duty self-locking bronze worm gear reduction running in oil with self-adjusting oil cooled mechanical brake to provide controlled load lowering.
- Winch drum has tapered flanges and cheek plates to reduce wire rope tangle.
- Re-buildable winch gearbox minimizes maintenance costs.
- Meets ANSI B30.5 safety standards.
- 3/16" x 35' aircraft grade wire rope with 4200 lbs. breaking strength. (Drum will accept optional cable lengths up to 75'.)
- Snatch block with swivel hook and safety latch for loads exceeding 1200 lbs.
- Pistol grip, weather-proof, removable pendant control with 15' cord.

OPTIONS

- Recessed or surface mounting sockets for multiple operating locations.
- Quick disconnect plug and socket for battery cable.
- Master disconnect switch and circuit breaker for equipment protection.
- Short mast for mounting on top of utility placement.
- Power elevating boom for precise load placement.
- Wire ropes up to 75' length for below ground lifting applications.
- AC winch for in-plant use.

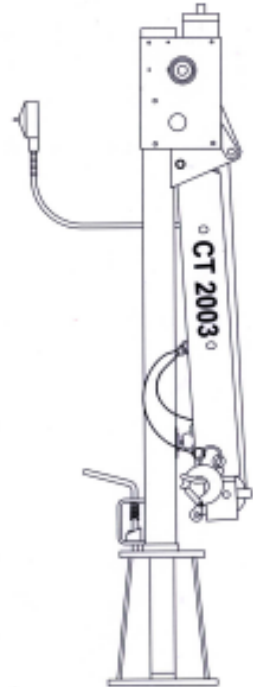

CRANE	MAXIMUM CAPACITY	MANUAL EXTENSION BOOM
CT2003FB	2000 lbs. @ 3'	3' - 5' folds for storage
CT2004FB	1500 lbs. @ 4'	4' - 7' folds for storage
CT2005	1200 lbs. @ 5'	5' - 9' non-folding



12110 Best Place • Cincinnati, OH 45241
 513-772-8448 • Sales 800-226-2238 • Fax 513-326-5427
 Email: sales@venturo.com www.venturo.com